
ascaso
BARCELONA

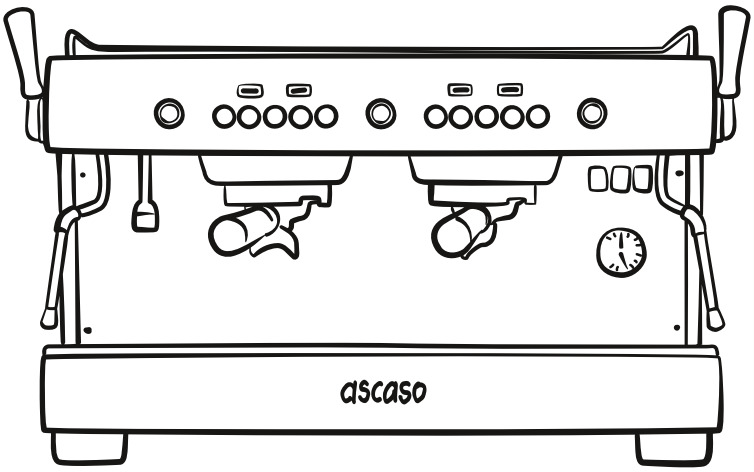

U.S. Installation guideline

BARISTA T


Dimensions	2 groups	3 groups
Height	19''	19''
Width	28''	37''
Depth	22''	22''


Weights		
Shipping Weight	157 lbs	205 lbs


Power		
Voltage/Phase/Cycle	208-240 VAC 1Φ 60Hz	208-240 VAC 1Φ 60Hz
Wattage	5500	6500
Full Load Amp Draw	23A	28A
Suggested Receptacle	6-30R or L6-30R	6-30R or L6-30R

Water Specifications			
T.D.S	90-150 ppm	PH	6.5-8
Total Hardness	50-70 ppm	Alkalinity	40-80 ppm
Total Iron	0-0.02 ppm	Chloride	0-30 ppm
Free Chlorine	0-0.05 ppm	Line Pressure	40-80 PSI
Total Chlorine	0-0.1 ppm	Flow Rate	2 GPM or 8 LPM
Max Suggested Distance from the Drain		5'	
Suggested Drain Slope		Min. 1/4" per foot	

*This machine must be installed in accordance with the applicable federal, state and local plumbing codes

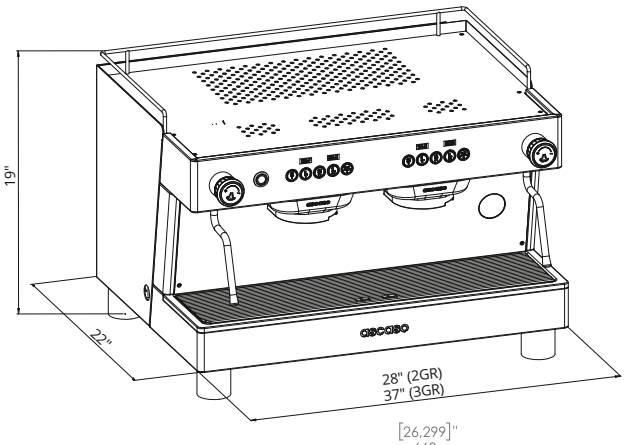


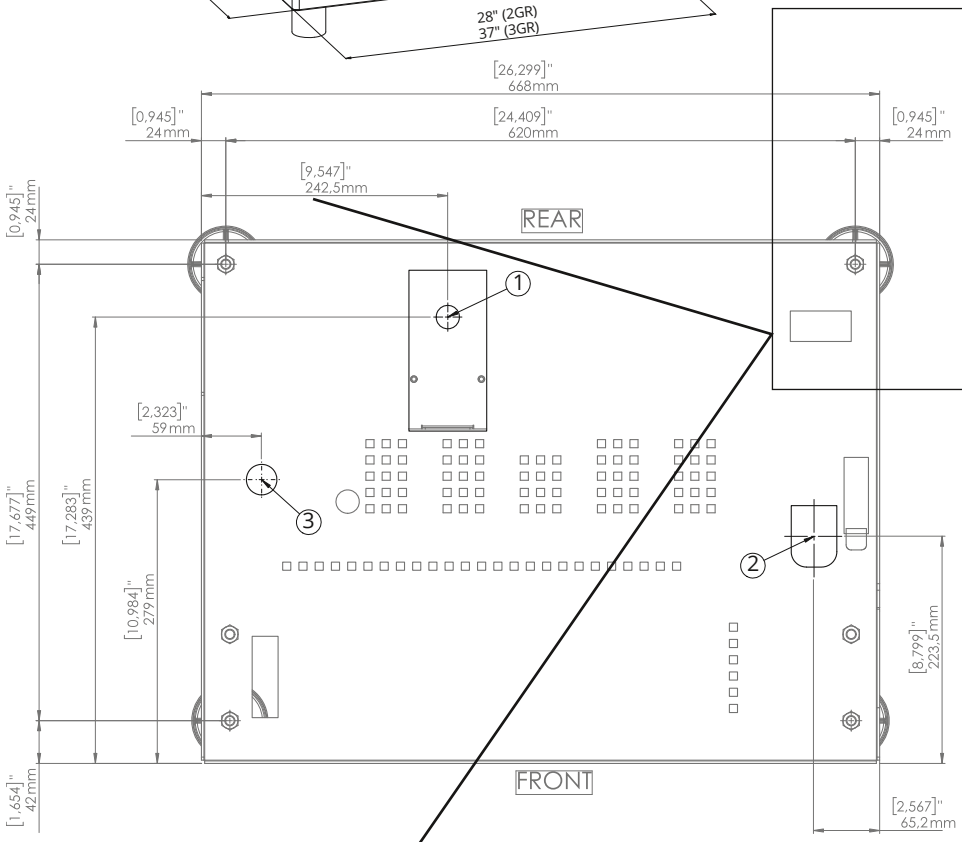

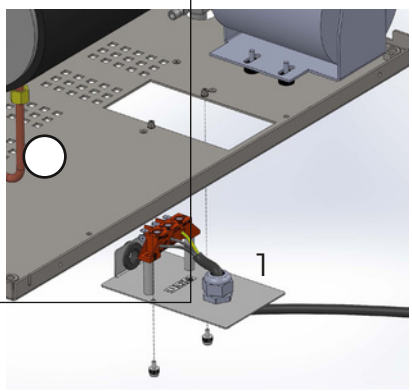

2 /3 GROUPS CONNECTIONS

1- POWER CABLE
2- DRAIN HOSE 5/8"
3- WATER INLET 3/8" MALE

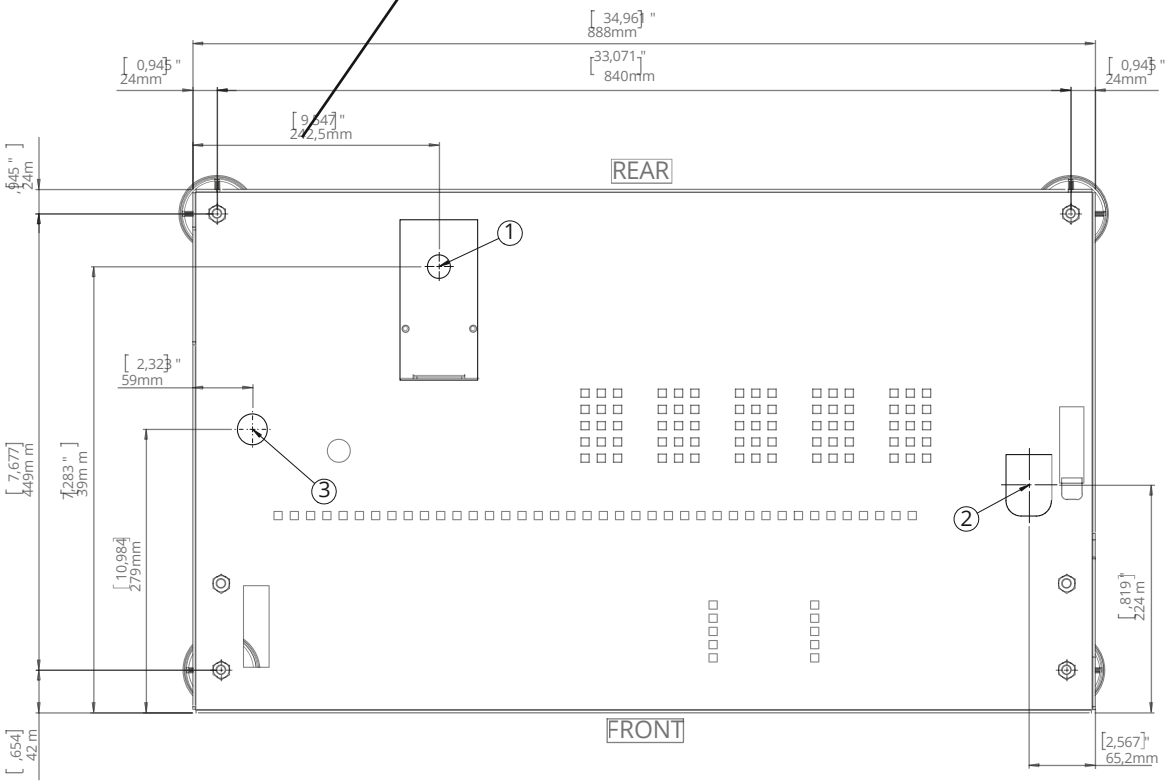

Ascaso Factory SLU | Coneixement 1 Pol. Ind. GaváPark 08850 Gavá / Barcelona / Spain
Tel. (34) 93 475 02 58 | ascaso@ascaso.com | www.ascaso.com