

# DRNX BY BROOD



Nitro Cold Brew



Mocktail



Sparkling Water



**CHILL**  
2°C IN MINUTES

**CREAM**  
INFUSE WITH ENDLESS NITROGEN

**POUR**  
POUR WITHIN 2MIN



## Flash Chilling, Unlimited Nitro, Effortless Installation.

Our proprietary tankless DRNX nitro cold brew machine flash chills liquids down to a crisp 36°F, infusing every cup with nitrogen so you're always equipped with an unlimited supply. Simply plug it in and start pouring delectable drinks in 2 minutes or less. No nitrogen tanks or complex plumbing required.



## Menu Transformation.

DRNX infuses any cold brew, **not just coffee**. Extend your menu and watch your margins soar with a unique offering of nitro-infused juice, tea, cocktails, and more.

## Five drinks per minute.

Fast Pouring – **Pour five drinks per minute consistently**, from coffee to cocktails. Our nitro tap system speeds up operations, impressing guests with unmatched flavor and service speed.

## Consistent Perfection.

Achieve a rich, garnish-ready head with a smooth, creamy taste. ***Mesmerize with a cascade lasting up to 2 minutes.*** Pour ice-cold nitro-infused coffee on tap for a reliably rich and flavorful refreshment.



ELECTRONIC CONTROLS  
SERVE AND NITRO INFUSION BY WIRE

PERFECT POUR  
CALIBRATED SYSTEM

PREMIUM MATERIALS & FINISH  
ANODIZED MILLED ALUMINUM LASER ETCH SURFACE

## Intuitive & Compact.

Fits seamlessly into an operation, DRNX is under 10 inches wide, sitting discreetly on any countertop. An intuitive design with a button lets you effortlessly serve nitro or still drinks.



## Canadian Excellence

Crafted close to home, BROOD partners with leading Canadian organizations, ensuring the highest standards of excellence.



## Time and Labor Savings


Pre-batch beverage mixes in advance, reducing the need for skilled labor during busy hours.



# DRNX SLM

PERFECT POUR  
READY-TO-DRINK

Recommended for:  
High Volume Locations; Cafes, Restaurants, Events

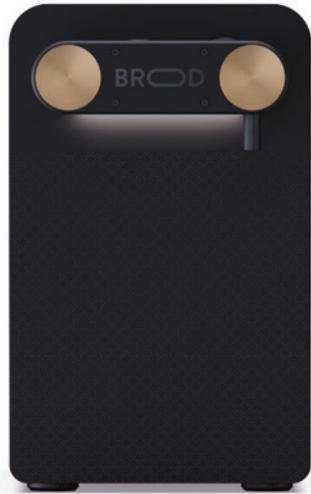

## PRODUCT FEATURES:

**Advanced Cooling:**  
Patented machine that flash chills any beverage to a crisp 36°F

**Unlimited Nitro:**  
Proprietary system; no nitrogen tanks required.

**Infusion On-Demand:**  
Switch from Nitro to Still with the press of a button.

**Fast Operation:**  
Pour five drinks per minute, every minute.


**Consistent:**  
Insures a consistently creamy, ice-cold pour for each serving.

**Compact:**  
Slides in easily on any countertop.

**Quick Installation:**  
Simply plug it in.


## 01 CONNECT

DRNX SLM can pour from any container.  
Prebatch ingredients in a container of your choice.

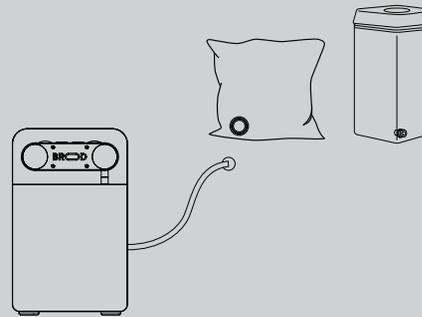


## 02 CHOOSE NITRO OR STILL

Press the infusion button for the creamy goodness of nitro infusion. De-press the infusion button for a traditional, still cold brew.

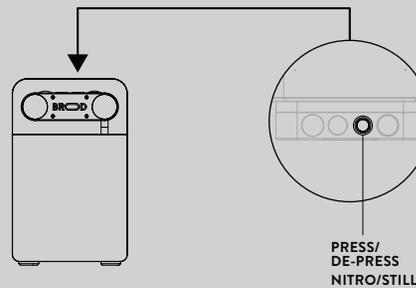

## 03 POUR

After connecting, raise a glass and select nitro or still.  
Press the pouring button  
Beverage ready for sipping in under 12 seconds.

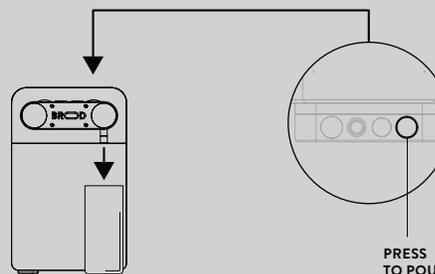


## PRODUCT SPECS

FUNCTION	COLD NITRO & COLD STILL
TAPS	1
POWER SUPPLY	100-120V / 60HZ 200-240V / 50-60HZ
PHASE	SINGLE
AMPS	2.8A
DIMENSIONS (W/H/D)	9.25/14.74/18.25IN
WEIGHT	75LBS
DISPENSING CAPACITY	102 L/HOUR
COFFEE TEMPERATURE AT TAP	36°F (+/- 3°F)
INTERNAL TUBING CAPACITY	20 OZ
OPTIONAL ACCESSORIES	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR
WARRANTY	1 YEAR
PRESSURE AT TAP	34 PSI
INPUT BEVERAGE	READY-TO-DRINK (RTD)
WATER ACCESS	NO
WATER ACCESS INLET	N/A
DRAINAGE	NOT REQUIRED
RATIO RANGE	N/A
DISPENSE OPTIONS	PUSH BUTTON OR, TAP HANDLE

## USE WITH


Quick Connect Cold Brew Bag-In-Box, Mocktails or any Container

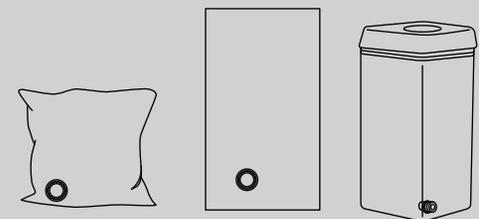

# DRNX DUO

TWO TAPS  
SAME SLM FOOTPRINT

Recommended for:  
Cafes, Restaurants, Bars

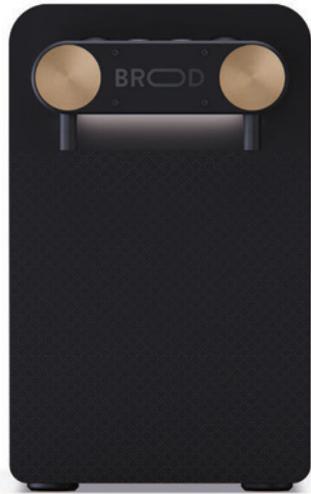

## PRODUCT FEATURES:

Like a Single Tap DRNX SLM, plus:

### Twice the Opportunity:

Two taps offer endless menu possibilities; accommodate a wide array of beverages, enhancing your menu variety.

### Fast Service:


Pour two perfectly crafted drinks *simultaneously*, slashing wait times and increasing customer satisfaction.

### Time-saving:

Frees up time for perfect garnishes, leaving a lasting impression on your customers.


## 01 CONNECT

Connect to any beverage container - kegs or bag-in-box - providing endless options.

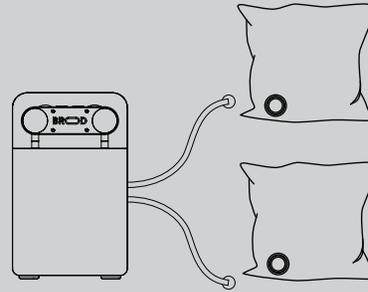


## 02 CHOOSE NITRO OR STILL

Choose between nitro or still pours by pressing a button.

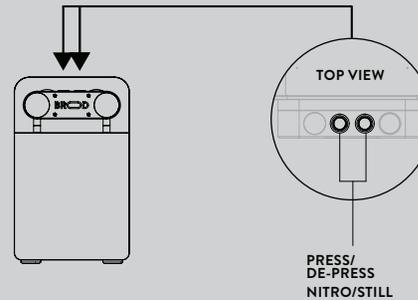

## 03 POUR

Pull the tap to dispense and experience the magic of nitro infusion in under 12 seconds.

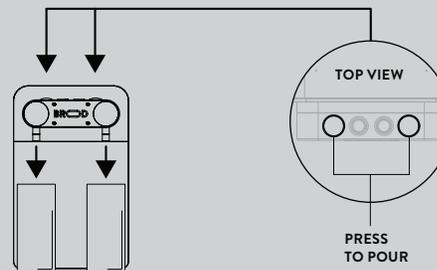


## PRODUCT SPECS

FUNCTION	COLD NITRO & COLD STILL
TAPS	2
POWER SUPPLY	100-120V / 60HZ 200-240V / 50-60HZ
PHASE	SINGLE
AMPS	3.0A
DIMENSIONS (W/H/D)	9.25/14.74/18.25IN
WEIGHT	78LBS
DISPENSING CAPACITY	102 L/HOUR PER TAP
COFFEE TEMPERATURE AT TAP	36°F (+/- 3°F)
INTERNAL TUBING CAPACITY	20 OZ PER TAP
OPTIONAL ACCESSORIES	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR
WARRANTY	1 YEAR
PRESSURE AT TAP	34 PSI
INPUT BEVERAGE	READY-TO-DRINK (RTD)
WATER ACCESS	NO
WATER ACCESS INLET	N/A
DRAINAGE	NOT REQUIRED
RATIO RANGE	N/A
DISPENSE OPTIONS	PUSH BUTTON OR, TAP HANDLE

## USE WITH


Quick Connect Cold Brew Bag-In-Box, or any Container

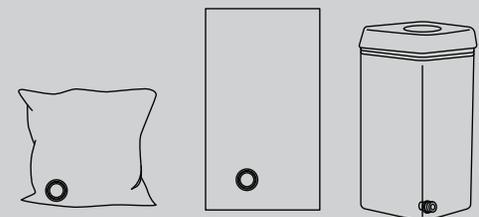

# DRNX MIX

BUILT FOR  
CONCENTRATES

Recommended for:  
Very High Volume Locations; Canteens, OCS, Hotels, Catering

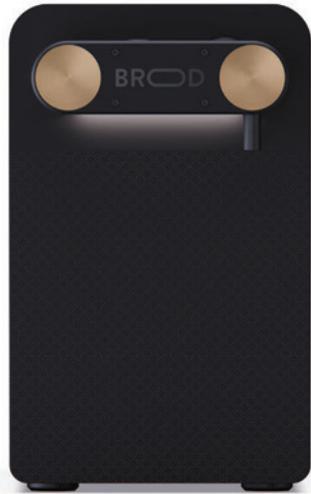

The DRNX MIX - built for use with concentrates - introduces a digital screen that enables users to dynamically adjust concentrate ratios for optimal taste and Brix levels. This innovation is revolutionizing the beverage industry by reducing costs per drink, all in a compact design.

## PRODUCT FEATURES:

### Precision Cooling:

Refrigerated 1.5-gallon internal reservoir consistently chilled at 36°F.

### Compact:

A superior substitute for cumbersome kegerators, providing efficiency in a compact form.

### Quick Installation:

2-minute installation without the requirement for tools or accessories.

### Brewing Options:

Directly pour ground coffee and water to create your own cold brew from scratch, or pour fresh cold brew.

### Mixing Capabilities:


Ideal for prebatching mocktails within the reservoir, ensuring consistency in taste, temperature, and appearance from pour to pour.

### Infusion:

Effortlessly switch between nitro and still options with the simple press of a button.


## 01 CONNECT

Connect to any concentrate beverage container or bag-in-box. Connect direct to water line.

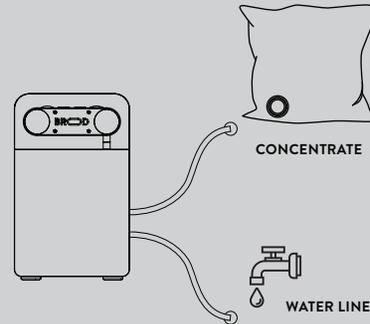


## 02 CHOOSE NITRO OR STILL

Press the infusion button for the creamy goodness of nitro infusion. De-press the infusion button for a traditional, still cold brew.

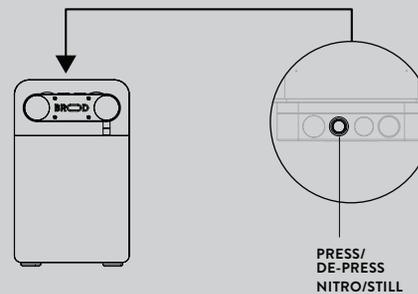

## 03 POUR

After connecting, raise a glass and select nitro or still. Press the pouring button. Beverage ready for sipping in under 12 seconds.

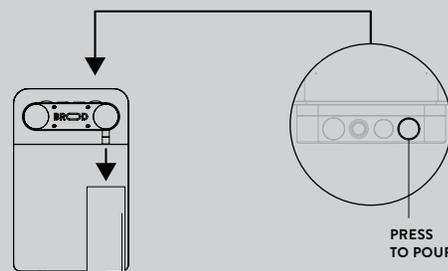


## PRODUCT SPECS

FUNCTION	COLD NITRO & COLD STILL
TAPS	1
POWER SUPPLY	100-120V / 60HZ 200-240V / 50-60HZ
PHASE	SINGLE
AMPS	2.8A
DIMENSIONS (W/H/D)	9.25/14.74/18.25IN
WEIGHT	78LBS
DISPENSING CAPACITY	102 L/HOUR
COFFEE TEMPERATURE AT TAP	36°F (+/- 3°F)
INTERNAL TUBING CAPACITY	20 OZ
OPTIONAL ACCESSORIES	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR
WARRANTY	1 YEAR
PRESSURE AT TAP	34 PSI
INPUT BEVERAGE	CONCENTRATE
WATER ACCESS	YES
WATER ACCESS INLET	1/4IN BARB
DRAINAGE	NOT REQUIRED
RATIO RANGE	1:1 TO 13:1
DISPENSE OPTIONS	PUSH BUTTON OR, TAP HANDLE

## USE WITH

Quick Connect Cold Brew Bag-In-Box, or any Container

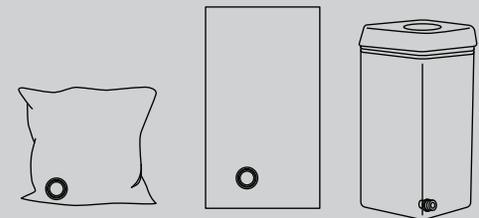

## OPTIONAL FITMENTS FOR BiBs AVAILABLE

VITOP/SMURFIT KAPPA | SCHOLLE IPN VARIOUS MODELS  
CORNYS/SANKE COUPLER | ANY MALE/FEMALE QUICK CONNECT

# DRNX BRW

Recommended for:  
Low Volume, Mocktails



**BUILT FOR  
BREWING**

## PRODUCT FEATURES:

### Precision Cooling:

Refrigerated 1.5-gallon internal reservoir consistently chilled at 36°F.

### Compact:

A superior substitute for cumbersome kegerators, providing efficiency in a compact form.

### Quick Installation:

2-minute installation without the requirement for tools or accessories.

### Brewing Options:

Directly pour ground coffee and water to create your own cold brew from scratch, or pour fresh cold brew.

### Mixing Capabilities:


Ideal for prebatching mocktails within the reservoir, ensuring consistency in taste, temperature, and appearance from pour to pour.

### Infusion:

Effortlessly switch between nitro and still options with the simple turn of a dial.


## 01 POUR

Plug in the DRNX BRW, pour coffee beans or cold brew into its ready-made reservoir.

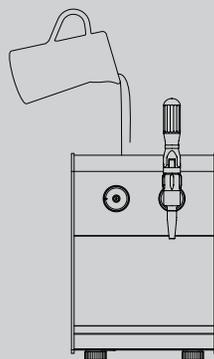


## 02 CHOOSE NITRO OR STILL

Turn dial for the creamy goodness of nitro infusion. Turn dial again for a traditional, still cold brew.

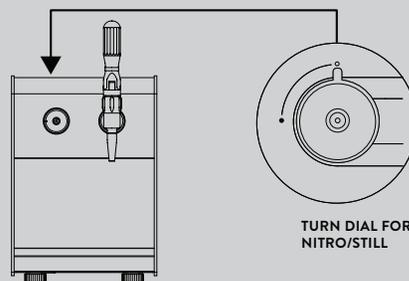

## 03 POUR

Pull tap to start pouring. It is as easy as that. Once the DRNX BRW reservoir is filled all that's left to do is simply raise a glass.




## PRODUCT SPECS

FUNCTION	COLD NITRO & COLD STILL
TAPS	1
POWER SUPPLY	100-120V / 60HZ 200-240V / 50-60HZ
PHASE	SINGLE
AMPS	2.8A
DIMENSIONS (W/H/D)	10.00/14.74/18.25IN
WEIGHT	55LBS
DISPENSING CAPACITY	60 L/HOUR
COFFEE TEMPERATURE AT TAP	36°F (+/- 3°F)
INTERNAL CAPACITY	1.5 GAL
OPTIONAL ACCESSORIES	BIB BAGS
WARRANTY	1 YEAR
PRESSURE AT TAP	34 PSI
INPUT BEVERAGE	READY-TO-DRINK (RTD)
WATER ACCESS	NO
WATER ACCESS INLET	N/A
DRAINAGE	NOT REQUIRED
RATIO RANGE	N/A
DISPENSE OPTIONS	TAP HANDLE

## USE WITH

Cold Brew, Premix or BiB



# SAMPLE MENU

INFUSE ANY COLD BREW  
NOT JUST COFFEE

NITRO INFUSED  
JUICE, TEA, COCKTAILS + MORE



**Nitro Drought Latte**  
SALTED CARAMEL SYRUP + OATMILK

**Nitro Espresso Martini**  
PREMIX ESPRESSO MARTINI

**Nitro Coffee Lemonade**  
COLD BREW + LEMONADE



OPTIONAL TAPS

A. MID-SIZE PLASTIC TAP

B. MINI-SIZE ALUMINUM TAP

*\*Option to customize with logo.*

A


B

BRANDED TAPS







# DRNX COMPARISON CHART



**SLM**



**DUO**



**MIX**

FUNCTION	COLD NITRO & COLD STILL	COLD NITRO & COLD STILL	COLD NITRO & COLD STILL
TAPS	1	2	1
POWER SUPPLY	100-120V / 60HZ 200-240V / 50-60HZ	100-120V / 60HZ 200-240V / 50-60HZ	100-120V / 60HZ 200-240V / 50-60HZ
PHASE	SINGLE	SINGLE	SINGLE
AMPS	2.8A	3.0A	2.8A
DIMENSIONS (W/H/D)	9.25/14.74/18.25IN	9.25/14.74/18.25IN	9.25/14.74/18.25IN
WEIGHT	75LBS	78LBS	78LBS
DISPENSING CAPACITY	102 L/HOUR	102 L/HOUR PER TAP	102 L/HOUR
COFFEE TEMPERATURE AT TAP	36°F (+/- 3°F)	36°F (+/- 3°F)	36°F (+/- 3°F)
INTERNAL TUBING CAPACITY	20 OZ	20 OZ PER TAP	20 OZ
OPTIONAL ACCESSORIES	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR	BIB BAGS BIB BOXES
WARRANTY	1 YEAR	1 YEAR	1 YEAR
PRESSURE AT TAP	34 PSI	34 PSI	34 PSI
INPUT BEVERAGE	READY-TO-DRINK (RTD)	READY-TO-DRINK (RTD)	CONCENTRATE
WATER ACCESS	NO	NO	YES
WATER ACCESS INLET	N/A	N/A	¼IN BARB
DRAINAGE	NOT REQUIRED	NOT REQUIRED	NOT REQUIRED
RATIO RANGE	N/A	N/A	1:1 TO 13:1
DISPENSE OPTIONS	PUSH BUTTON TAP HANDLE	PUSH BUTTON TAP HANDLE	PUSH BUTTON TAP HANDLE

## FEATURES

Dispenses both nitro and still cold brew from the same tap

Extracts nitrogen from the air; no nitrogen tank necessary

Pulls from any container, kegs are only one option

Plug & play in 2 minutes

Consistency with every pour

Chills on demand to 36°F

Works with any drink

No need to deal with gas tanks or companies

Compact design; can be placed over or under the counter

Patent Pending

In-line dosing pump that works with all ratios of cold brew concentrates