ITCB-DV, 29" Trunk, W/Tray

Height: 35.0" Width: 11.6" Depth: 22.1" (88.9cm) (29.5cm) (56.1cm)



Server(s) sold separately

Specifications

Product #: 52200.0100 Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	Yes	NEMA 5-15P	80	60°F (15.5°C)	1	2	60
120/208	13	2650	-	N/A	123	60°F (15.5°C)	1	3	60
120/240	15	3500	-	N/A	163	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

• Sleek modernized design language, with rounded angles on the corners and trunk

- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- · BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- · Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Brews into all BUNN iced tea dispensers (except TDS-5), 1.9 to 3.8 liter airpots, thermal carafes --- and can accommodate BUNN ThermoFresh® Servers [servers not included]
- · Includes integrated flip tray that converts to three positions: thermal carafe, airpot and tea dispenser
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Agency:

Funnel: Black Plastic





BrewWISE

Plumbing Requirements

CAD Drawings

	•				U	
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	1/4" Male Flare Fitting	1.25	•		


MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 06/28/2021

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

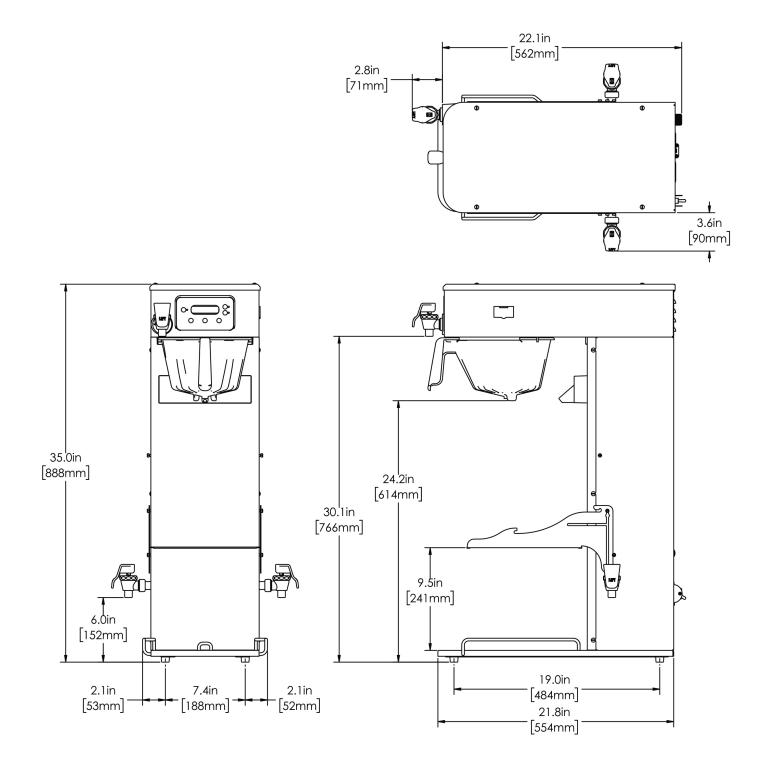

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.0 in.	11.6 in.	22.1 in.	38.0 in.	13.3 in.	27.4 in.	47.600 lbs	7.976 ft ³
Metric	88.9 cm	29.5 cm	56.1 cm	96.5 cm	33.7 cm	69.5 cm	21.591 kgs	0.226 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
Last Updated:

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
06/28/2021

For most current specifications and other info visit bunn.com.
Control of the second seco

Related Products & Accessories: ITCB-DV, 29" Trunk, W/Tray(52200.0100)





Serving & Holding Options: ITCB-DV, 29" Trunk, W/Tray(52200.0100)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
Last Updated:

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
06/28/2021

For most current specifications and other info visit bunn.com.
Control of the second seco

Serving & Holding Options: ITCB-DV, 29" Trunk, W/Tray(52200.0100)



