ITCB Twin HV (High Volume) 120/240V

Height: 35.0" Width: 20.5" Depth: 24.0" (88.9cm) (52.1cm) (61.0cm)





- Sleek modernized design language, with rounded angles on the corners and trunk
- Brews into 1.5 gallon and 1.0 gallon BUNN Thermofresh servers for coffee, and TD4T, TDO and TDO-N tea dispensers
- Digital readout displays in English, Spanish, or French --- for easier programming and control
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Tea brewing capability built-in with integrated dilution nozzle, software and Quick Brew tea brewing funnel
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brews coffee or tea on both sides Mix and Match to meet your needs
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Hot water faucet (supplied for custom installation)

Agency:





Specifications

Product #: 52400.0100
Water Access: Plumbed

Finish: Stainless

Additional Features

Electrical & Capacity

120/240	25	6000	Yes/	-	672	60°F (15.5°C)	1	3	60
Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires	Hertz

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


1 fambing requirements							
	PSI	kPa Fitting Supplied Water Flow Required (GPM)					
	20-90 138-621		3/8" BSPP	1.25			

CAD Drawings

2D	Revit	KLC
•		

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



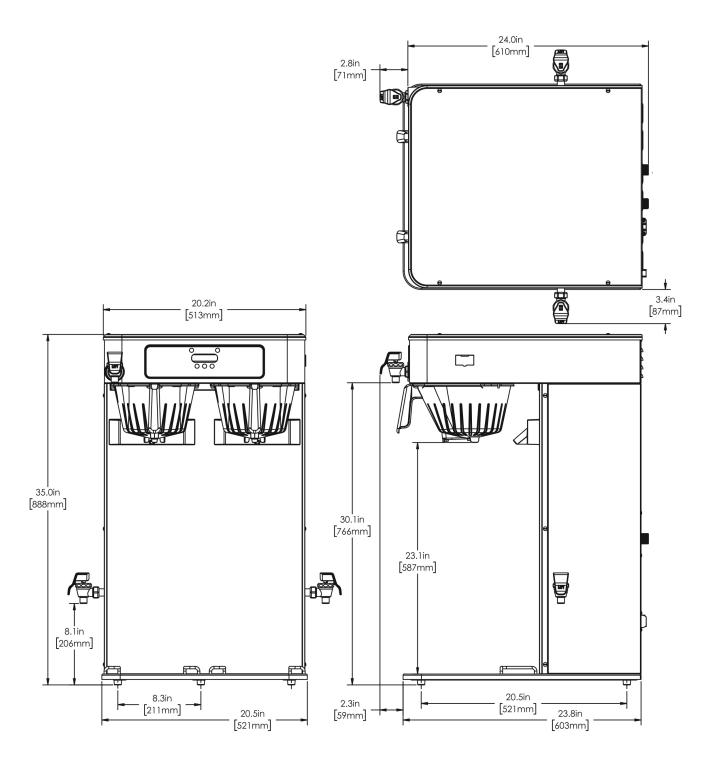

	Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.0 in.	20.5 in.	24.0 in.	38.3 in.	24.4 in.	28.6 in.	95.210 lbs	15.411 ft³	
Metric	88.9 cm	52.1 cm	61.0 cm	97.2 cm	61.9 cm	72.6 cm	43.187 kgs	0.436 m³	



Related Products & Accessories: ITCB Twin HV (High Volume) 120/240V(52400.0100)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



FUNNEL ASSY, SMART COFFEE BLK-CLEARED

Product #: 53463.0021



Product #: 53463.0036



STAND ASSY KIT, TF SERVER

Product #: 54473.1000



Serving & Holding Options: ITCB Twin HV (High Volume) 120/240V(52400.0100)



TD4, SIGHT GAUGE SWT/UNSWT HDL

Product #:03250.0003



TD4T, SIGHT GAUGE NUDGER HDL

Product #:03250.0004



TD4T,BREW THRU LID NUDGER HDL

Product #:03250.0005



TD4, BREW THRU LID SWT/UNSWT HDL

Product #:03250.0006



TD4T, BREW THRU LID NO DECAL NUDGER HDL

Product #:03250.0018



AIRPOT, 2.5L GL PB SINGLE PK

Product #:13041.0001



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



TDS-3, 3 GAL

Product #:33000.0000



TDS-3.5, 3.5 GAL

Product #:33000.0023



TDO-4, RESERVOIR

Product #:34100.0000



TDO-5, RESERVOIR

Product #:34100.0001



TDO-4, RESERVOIR BREW THRU

Product #:34100.0002



TDO-5, RESERVOIR, BREW THRU

Product #:34100.0003



TDO-N-3.5, RSVR

Product #:39600.0001



LIFT HANDLE

Product #:39600.0031



TDO-N-3.5, RSVR W/ PINCH TUBE

Product #:39600.0047



TF SERVER, 1G DSG GEN3

Product #:42700.0200



TF SERVER, 1.5G DSG GEN3

Product #:42750.0200




TD3T-N, RSVR BREW THRU LID BUNN

Product #:43900.0001

Serving & Holding Options: ITCB Twin HV (High Volume) 120/240V(52400.0100)







Product #:44000.0200



