## ICB Twin Tall Platinum Edn, 120/240V SST

Height: 35.0" Width: 20.2" Depth: 21.9" (88.9cm) (51.3cm) (55.6cm)





- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- USB programming for uploading and downloading recipes and software updates, all in less than a minute
- Brews into 2.5 to 3.8L (84 to 128 oz) airpots and 3.8 to 5.7L (1 to 1.5 gallon)
   Thermofresh servers
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- · BUNN Infusion Series technology allows for multiple recipes from one footprint
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of the brew funnel until drip-through is complete
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing
- Hot water faucet (supplied for custom installation)
- PROP 65 Warning Decal included in packaging with equipment

#### Agency:





### **Specifications**

Product #: 53400.0101 Funnel: Stainless Steel

Water Access: Plumbed
Interface: Wireless
Finish: Stainless

#### **Electrical & Capacity**

120/240	25	Watto	Attached	1 109 1 7 70	236ml cups/hr	Temp.	1 11400	plus Ground	110112
Volts*	Amps	Watts	Cord	Plug Type	8oz cups/hr	Input H <sup>2</sup> O	Phase	# Wires	Hertz

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements

	Transing Requirements								
PSI kPa		kPa	Fitting Supplied	Water Flow Required (GPM)					
	20-90	138-621	3/8" Male Flare Fitting	1.00					


## CAD Drawings

Additional Features

2D	Revit	KLC

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



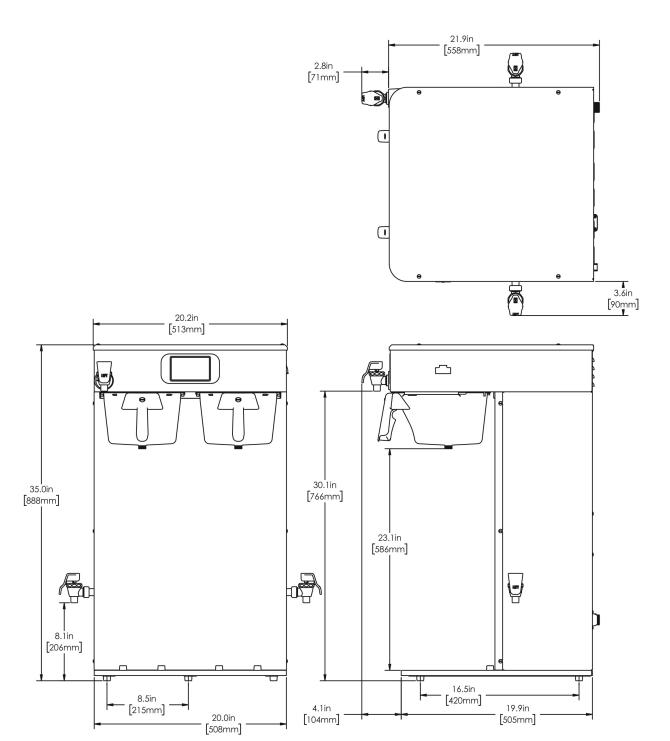

	Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.0 in.	20.2 in.	21.9 in.	38.3 in.	23.8 in.	28.4 in.	89.000 lbs	14.917 ft³	
Metric	88.9 cm	51.3 cm	55.6 cm	97.2 cm	60.3 cm	72.1 cm	40.370 kgs	0.422 m³	



## Related Products & Accessories: ICB Twin Tall Platinum Edn, 120/240V SST(53400.0101)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000

FUNNEL ASSY, SST INFUSION COFFEE

Product #: 54675.0001



# Serving & Holding Options: ICB Twin Tall Platinum Edn, 120/240V SST(53400.0101)



TF SERVER, DSG2 1G/3.8L

Product #:42700.0000



TF SERVER, 1G DSG GEN3

Product #:42700.0200



TF SERVER, DSG2 1.5G SST

Product #:42750.0000



TF SERVER, DSG2 1.5G BLK

Product #:42750.0001



TF SERVER, DSG2 1.5G

Product #:42750.0003



TF SERVER, 1.5G DSG GEN3

Product #:42750.0200



TF SERVER, 1G/3.8L MECH

Product #:44000.0000



TF SERVER, 1G MECH GEN3

Product #:44000.0200



TF SERVER, 1.5G/5.7L MECH

Product #:44050.0000



TF SERVER, 1.5G/5.7L MECH BLK

Product #:44050.0001



TF SERVER, 1.5G MECH GEN3

Product #:44050.0200

STAND ASSY, TF SERVER

Product #:54473.0000



STAND ASSY KIT, TF SERVER

Product #:54473.1000

