## ICB TWIN TF 1.5 Gal PE, 120/240V SST

Height: 34.0" Width: 22.6" Depth: 23.3" (86.4cm) (57.4cm) (59.2cm)



Server(s) sold separately

## Specifications

Product #: 54200.0101

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Funnel: Smart Funnel Faucet: Lower Legs: 4" Satin Nickel Legs

 Intuitive 4.3" touchscreen with user interface provides an enhanced experience when operating and programming the brewers

- SmartWAVE sprayhead technology creates an industry best uniformity of extraction for exceptionally smooth tasting coffee
- Platinum Edition SmartWave technology delivers a timed air purge at the end of the brew cycle, removing residual water from the sprayhead, reducing lime build up and ultimately extending the life of the equipment
- The ICB Twin Infusion Series coffee brewer delivers twice the brew capacity, from a single platform
- Multiple recipes from one footprint --- with six brew buttons and three batch sizes
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- USB port for easy programming
- Digital readout displays in English, Spanish, or French ---for easier programming and control
- Energy-saver mode reduces tank temperature during idle periods
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- ICB TF 54200.0101 is compatible with new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base), Titan® 1.5-gallon servers, and Airpots
- PROP 65 Warning Decal included in packaging with equipment

Agency: Servers hot included unless otherwise noted



#### **Additional Features**

Hot Water Button

#### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	Yes/	-	280	60°F (15.5°C)	1	3	60

\*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

## **Plumbing Requirements**

### **CAD** Drawings

					U			
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC		
20-90	138-621	3/8" Male Flare Fitting	1.00	•	•	•		


WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 07/29/2021

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.



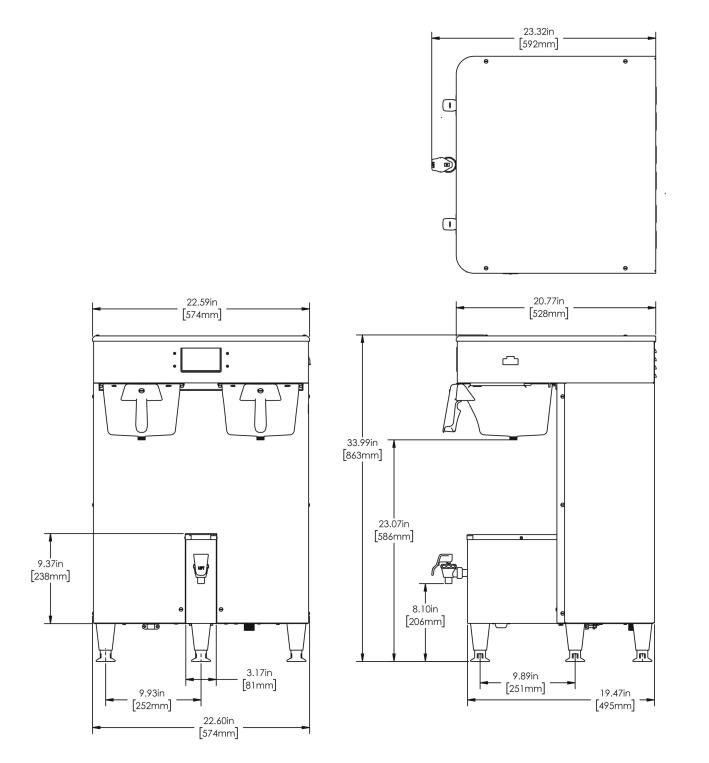

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	34.0 in.	22.6 in.	23.3 in.	30.8 in.	25.8 in.	26.7 in.	87.600 lbs	12.259 ft <sup>3</sup>	
Metric	86.4 cm	57.4 cm	59.2 cm	78.1 cm	65.6 cm	67.8 cm	39.735 kgs	0.347 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 07/29/2021

 For most current specifications and other info visit bunn.com.
 07/29/2021

# Related Products & Accessories: ICB TWIN TF 1.5 Gal PE, 120/240V SST(54200.0101)





Serving & Holding Options: ICB TWIN TF 1.5 Gal PE, 120/240V SST(54200.0101)



