

Rancilio Classe 5

Pre-Install Checklist | 2G Compact model



Electrical Specifications

Espresso Machine

Voltage: 220 VAC Single Phase

Element: 3000 W

Circuit Size: 20 A

Receptacle: NEMA L6-20R




Setup Guidelines

Each machine requires its own drain hose, water supply line, water filter, and electrical receptacle.


Allow at least 6 in. of clearance from all sides of the machine.

- 1** Dedicated cold water access line with standard female 3/8 in. NPT fitting and manual shut-off valve within 4 ft of the machine required
- 2** Dedicated in-line water filter required for each machine. Allow at least 24 in. height and 5 in. width of clearance for filtration unit. Filtration system can be mounted under counter (shown) or above counter.
- 3** Drain hose. Open gravity drain with at least 2 in. internal diameter within 4 ft of the machine required
- 4** Allow at least 3.5 in. of clearance from receptacle for plug. Power can be installed under counter (shown) or above counter.
- 5** 3.5 in. diameter hole for drain and power (if under counter)

COUNTER DIAGRAM

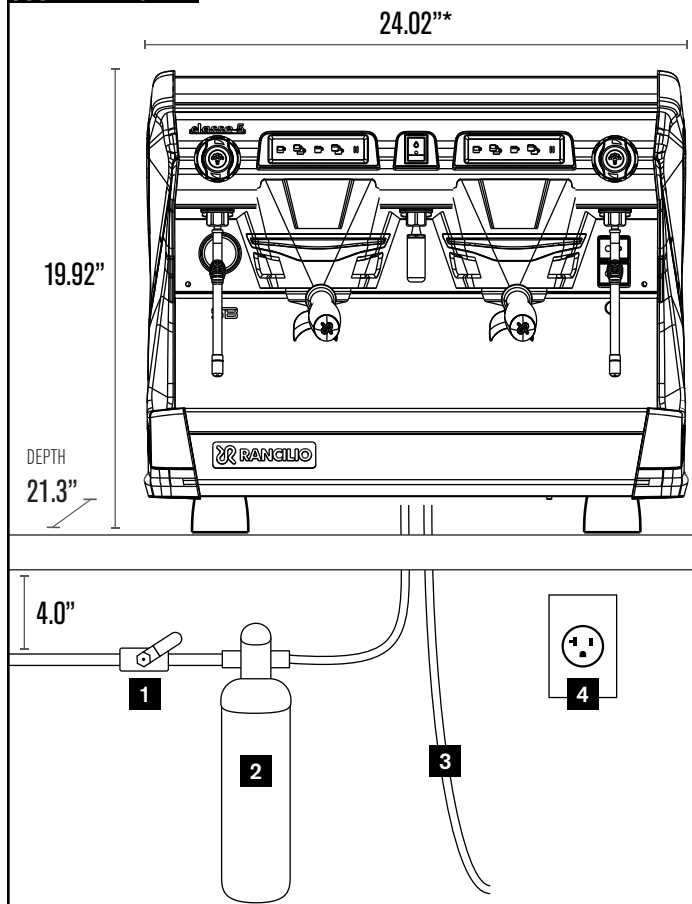

DRILL DIAGRAM

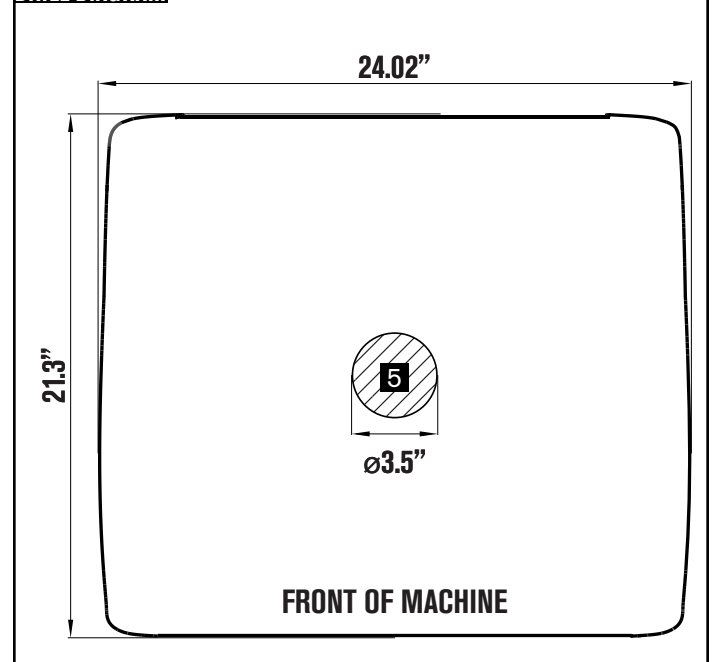

Water Requirements

Dedicated cold water access line with standard female 3/8 in. NPT fitting and manual shut-off valve within 4 ft of the machine.

Water entering the machine has a water hardness level of 2-3 GPG at all times.

Line pressure of water entering the machine is between 30-70 PSI. If line pressure is not consistently within this range, a pressure regulator must be installed.

Dedicated water filter for each machine.

Drain Requirements

Open gravity drain with minimum 2 in. ID within 4 ft of the machine.

Space Requirements

At least 6 in. of clearance from all sides of the machine.

At least 24 in. height and 5 in. width of clearance for filtration unit. Filtration system can be mounted under counter (shown) or above counter.

Coffee Requirements

Provide 2 lbs of each type of coffee being served (i.e. 2 lbs of regular coffee & 2 lbs of decaf coffee) on the day of installation. If the coffee offering is changed after machines have shipped, a service technician must be dispatched to program the new coffee options. The customer is responsible for any service charges associated with changes to coffee options after shipment.

Milk Requirements OPTIONAL FEATURE

If an iSteam wand is installed on the machine, please provide at least 1 gallon of milk to allow the technician to program the steaming presets.

By signing, you agree to the following:

- If the installer arrives and the site is not ready, pre-payment of \$500.00 must be issued to Rancilio Group North America before a second installation attempt will be made.
- Installation must be completed by a certified technician with written permission from Rancilio Group North America.
- You have read and understood the Pre-Install Checklist.
- You are aware of the requirements for installation.

Failure to comply will void all warranty and maintenance packages.

Please complete all information fields, sign, and return via email to servicecoordinator@ranciliogroupna.com OR fax to (630) 914-7901.

Full Name		Company Name	
Email		Phone	
Location Street Address Line 1			
Location Street Address Line 2			
City		State	ZIP
Signature			Date