





Versions



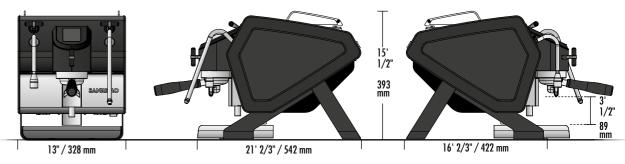

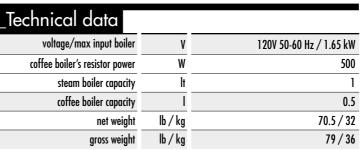

35



Colors

Black: matt glossy (side frames)	RAL 9005
White: matt glossy legs and side	RAL 9003 RAL 9005
White: matt glossy (side frames)	RAL 9003
Customizations available, see YOU_KIT catalogue for more info.	



Customizable presets

Ê

27.11.20

۲

27.11.20

Pressure

🕑 Time

P F PRE INFUSION

...

Custom profile 01

Extraction profiles customizable and savable:


- 6 standard profiles with optimal parameters presets
- 12 completely customizable profiles in all 3 extraction phases, with a capacity to disable pre-infusion and post-infusion the Paddle
- 36 - Set your manual profiles from the Paddle

3



Extraction mode

Check your extraction in real time verifying pressure flow rate









(F) (F)

T Flow

Quantity

2.5 BA

>

POST INFUSION

Custom profile 02

4.5 /s

6 н

Electronic paddle

Manually create your profiles.

Configure the Paddle (right/left) based on your gestures.









Energy efficiency

Setting:

n The Fly* function

- Automatic: allows the user to associate up to 6 daily time frames.
- Manual: allows the user to turn the machine or the individual boilers on and off manually.

Two programmable modes:

- Stand-by: low power consumption condition, compliant with the ErP Directive (2009/125/EC).
- Eco: keeps the machine on, but at a reduced temperature for quick start-up.

For both, the user can enable the Energy Saving function, which automatically turns the machine off after the set time.

