G4 GemX™ IntelliFresh® Coffee Brewer

With FreshTrac® Satellites

G4GEMXSIFT63A1000
G4 Gemini IntelliFresh Single Coffee Brewer
with FreshTrac Satellite

G4GEMXTIFT10A1000
G4 Gemini IntelliFresh Twin Coffee Brewer
with FreshTrac Satellites

GemX IntelliFresh® Brewer Features

LED notification of freshness timing.

Gold Cup Series™ – digital control module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion to pulse-brewing to water bypass.

Preset, one-touch Global Recipes – Based on coffee type, grind and weight. Simplifies profile setting for gourmet results every time.

Patented fast-wetting AFS spray head and non-immersed water temperature sensor.

Encapsulated control board – Protects against steam, water and impact.

Field selectable for 0.5, 1.0 or 1.5 gal. batch brewing.

New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

GemX Satellite Features

Easy Maintenance – Smart, water-tolerant design.

Intuitive FreshTrac LED System – Communicates freshness and volume at a distance — no distracting alarms.

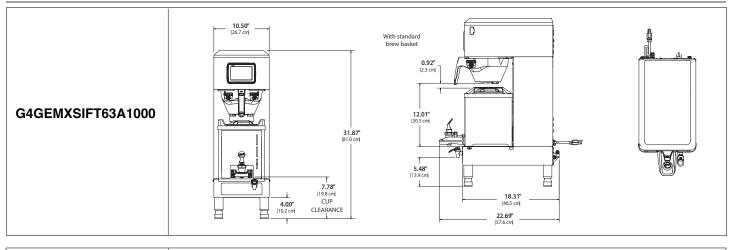Satellite Bottom Sloping Design – Allows full evacuation. Easy to empty and clean.

User Selectable LED Colors – Green, White, Yellow or Red. Select "fresh" color and a 2nd color for "Quality Expired."
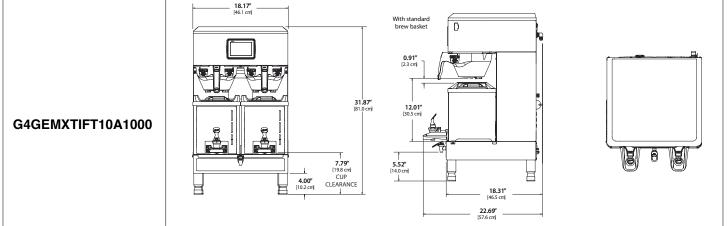
- **COLOR 1** – Flashes During Brew Cycle
- **COLOR 1** – Solid ON Indicates "Fresh"; programmable from 20 to 230 min.
- **COLOR 2** – Flashes to indicate "Quality Expired". Continuous for up to 18 hours.
- **SOLID BLUE** – Indicates volume after warmer is OFF; Warmer turns off automatically after 18 hours from start of brew cycle. No light indicates satellite is empty.

Apx 1.5 Gal

Apx 1.0 Gal

Apx 0.5 Gal

Apx 0.25 Gal

G4 GemX™ IntelliFresh® Coffee Brewer

G4GEMXSIFT63A1000

With standard brew basket

G4GEMXTIFT10A1000

With standard brew basket

Dimensions

MODEL#	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWED FILL WEIGHT	BREWED GAL/HR
G4GEMXSIFT63A1000	Single, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 10.50" x 22.69"	68.4 lbs.	4.5/10.0
G4GEMXTIFT10A1000	Twin, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 18.17" x 22.69"	128.4 lbs.	15.0/21.0

Utility Requirements

	ELECTRICAL							WATER			
MODEL#	PHASE	VOLTS	AMPS	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MINIMUM FLOW RATE	TANK VOL.
G4GEMXSIFT63A1000	1 PH	120/220V	13.5/13.5A	2 X 1600W	2W/3W + G	1650/2800W	50/60Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 gal
G4GEMXTIFT10A1000	1 PH	220V	23.0/34.0A	3 X 2500W	3W + G	5100/7500W	50/60Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal

Accessories

GEM3XIFT
1.5 Gal. Satellite Dispenser with IntelliFresh and FreshTrac (Included)

WC-66145K
Kit, Holder Flavor Clip (Included)

WC-66154
Holder, Flavor Card GEMX3 (Sold separately)

GEM5XTIFT
GEMX Twin Warmer Stand (Sold separately)

GEM5XSIFT
GEMX Single Warmer Stand (Sold separately)

⚠ WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www. P65Warnings.ca.gov