

Rancilio Classe 5 USB

Entry to Mid-range Traditional Espresso Machine

ESPRESSO MACHINE SPECIFICATIONS:

The Classe 5 exemplifies functional minimalism combined with contemporary aesthetics. It features modern side panels, curved group covers and an ergonomic work area for comfort and convenience. The intuitive brew group control buttons are designed for instant interaction between the barista and the machine.

The Classe 5 is the combination of modern style and contemporary art in an espresso machine. Made from brushed stainless steel, ABS and nylon panels, the Classe 5 has Soft Touch keypads for easy start and stop controls with white LED backlights. The Classe 5 comes in Standard or Compact versions in Anthracite Black and Ice White.

Discover functional minimalism with the Classe 5.

STANDARD FEATURES:

- Made from brushed stainless steel, ABS and nylon panels
- Soft touch keypads with 4 programmable drink doses for easy espresso preparations
- White LED backlights on key pads
- Independent heat exchangers
- Electrical heating
- Built-in volumetric pump
- Boiler and pump pressure control gauge
- USB port for easy management of machine parameters
- Two manual steam wands for frothing and steaming milk
- C-Lever ergonomically designed steam hand features two positions, pulse steam (down) or steam fully on (up)
- Hot water outlet with manual valve knob control
- Scratch-proof polymer drain insert that can be removed and easily cleaned in dishwasher
- Adjustable feet
- 1-year parts warranty



OPTIONS:

YouSteam: Barista assistance steam wand, adds air on-demand

Electric Cup Warmer: A special heating element with five levels of controlled heat on the top of the machine to keep ceramic cups hot

Color Options: Anthracite Black and Ice White

ACCESSORIES IN THE BOX:


- 2 Group - 2 double porta filters
- 3 Group - 3 double porta filters
- Rubber blind disks for cleaning
- User manual
- Foot extensions

SPACE REQUIREMENTS:

- Allow 6" clearance on all sides of the machine.
- Allow 24" x 5" for in-line filter. Filter can be mounted behind the machine or under the counter.
- Allow a minimum of 3" (7.62 cm) clear space under filter to facilitate filter change.

Rancilio Classe 5 USB

Entry to Mid-range Traditional Espresso Machine

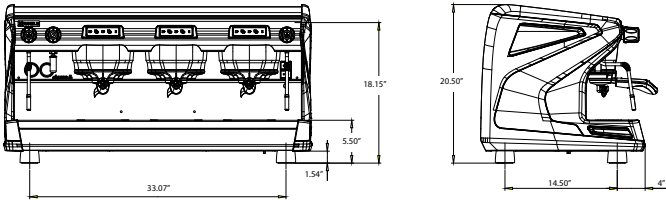

PLEASE NOTE: Power can be installed under or above counter. Please allow 3-4" of space for the plug, especially when placing power above the counter and behind the machine.


COUNTER REQUIREMENTS:

Width	Depth	Height	Weight
2 GROUP Compact			
24"	22"	21"	106 lbs
2 GROUP			
31"	22"	21"	122 lbs
3 GROUP			
40"	22"	21"	155 lbs

SHIPPING DIMENSIONS AND WEIGHT:

Length	Width	Height	Weight
2 GROUP Compact			
35"	26"	29"	173 lbs
2 GROUP			
35"	26"	29"	189 lbs
3 GROUP			
47"	34"	29"	222 lbs

DRILLING PLAN



(front)



SERVICE CONNECTIONS:

Electrical Connections

2 GROUP Compact

Voltage Range: **208-240 VAC Single Phase***

Watts: **3000 W***

Circuit Size: **20 amps**

Suggested Receptacle: **NEMA 6-20R**

*2 Group Compact may be ordered as a special order 110 V machine and a 2700 watt heat element.

2 GROUP

Voltage Range: **208-240 VAC Single Phase**

Watts: **4300 W**

Circuit Size: **30 amps**

Suggested Receptacle: **NEMA 6-30R**

3 GROUP

Voltage Range: **208-240 VAC Single Phase**

Watts: **6000 W**

Circuit Size: **30 amps**

Suggested Receptacle: **NEMA L6-30R**

WATER CONNECTIONS:

Dedicated cold water access line with standard female 3/8" NPT fitting and manual shut-off valve within 4' of the machine required.

DRAIN REQUIREMENTS:

Open gravity drain rain with minimum 2" I.D. within 4' of the machine.

WATER QUALITY STATEMENT:

The fact that water is potable is no guarantee that it is suitable for coffee machines. Your water supply must be within these general guidelines:

SUPPLY PRESSURE: 30-70 psi

HARDNESS: 2-3 GPG (1 grain of hardness = 17.1 ppm)

Water entering the machine should have a water hardness level of 2-3 GPG at all times. If the water supply is not within this range, a dedicated water softener (if above 3 GPG) or mineral addition cartridge (if below 2 GPG) is required for the coffee machine to operate properly over time (see Rancilio Group North America Water Quality Statement for further details).